


2000 SERIES

Fogger



2600 MODEL SHOWN

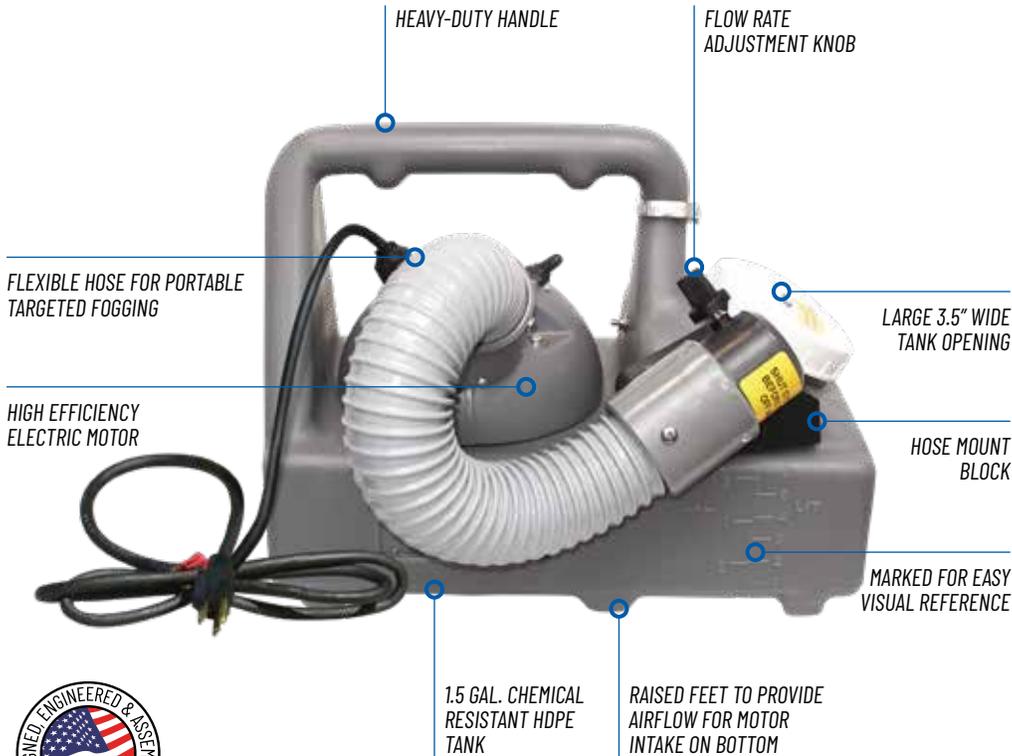

FEATURES & BENEFITS

INDOOR OR OUTDOOR

Suitable for indoor or outdoor pest control applications given safe use of electrical equipment.

DURABLE

Heavy duty HDPE thick wall tank construction.

SERVICEABLE

Service parts and support are available to make your investment last and survive normal wear and tear.

ADJUSTABLE FLOW RATE

Adjustable output rates of 0-18 oz. allow for fine-tuned control of chemical output, saving money, and avoiding over application.

PORTABLE

Built to be on the move, our 2600 model with hose is meant to allow you to cover ground and fog significant areas.

INDUSTRIES

Disinfection
Pest Control
Odor Control

COMPATIBILITY

Water or Oil-Based
Insecticides, Disinfectants

DESCRIPTION	ATTACHMENT	MODEL #	ORDER #
MY-TI-LITE	-	2300	15015000
ULTRA-LITE	-	2400	15015100
	18" Hose		15914901
FLEX-A-LITE	36" Hose	2600	15914909
	48" Hose		15914906



SCAN FOR MORE PRODUCT INFORMATION



	MY-TI-LITE 2300	ULTRA-LITE 2400	FLEX-A-LITE 2600
APPLICATION	General, light duty fogging applications	Adjustable fixed fogging applications	Adjustable portable fogging applications
PERFORMANCE	Non-ULV wet fog discharge that settles quickly	Heavier fogs and mists will increase with flow rate	Variable flow from ULV to mist
FLOW RATE	9 oz/min (4.2 gal/hr)	0-9 oz/min (0-4.2 gal/hr)	0.33-2.5 oz/min. (0-8.4 gal/hr)
ADJUSTABLE	No	Yes	Yes
HOSE	-	-	18", 36", or 48"
DROPLET SIZE	20-35 microns	20-56 microns	20-56 microns
MOTOR	Single stage motor	Single stage motor	Single stage motor
COMPATIBILITY	Water or Oil-based formulation	Water or Oil-based formulation	Water or Oil-based formulation
WEIGHT	8.75 lbs. empty	8.75 lbs. empty	9 lbs. empty