

# FLEX-A-LITE 2600

Fogger



## SPECIFICATIONS

HOSE	18 in
TANK SIZE	1.5-gal tank
ADJUSTABLE FLOW RATES	0.33-2.5 oz/min, 0-8.4 gal/hr
DROPLET SIZE	40-56 microns (VMD), droplet throw 15 ft
COVERAGE	40 sq ft at high application setting
WEIGHT	9 lbs (empty)
DIMENSIONS	H 12 in / W 8.5 in / L 15 in



SCAN FOR MORE  
PRODUCT DETAILS




## TROUBLESHOOTING

SYMPTOM	POSSIBLE CAUSE	CORRECTIVE ACTION	PART DIAGRAM REFERENCE (PG.2)
Fog and power mist is weak.	Cap is not sealed.	Tighten the cap.	23
Liquid forms around the base of the motor housing, around mounting screws.	Unit may have been operating too long and fog droplets in the air are forming on the metal screws.	Turn off the unit for a few minutes and wipe down the housing.	20, 36, 37
Fogger is operating erratically, frequently turning on and off.	Cord and/or motor has been damaged.	Inspect the electric cord and the plug for damage. Motor may be damaged from moisture, replace motor.	19, 22, 33
Fogger becomes very warm (hot) during normal operation.	Motor filter needs cleaning.	Remove the lower plate (motor guard) and clean the filters with a nylon brush.	34
Fogger leaks around cap.	Cap is not sealed.	Replace gasket.	23

## FLEX-A-LITE 2600

ITEM	ORDER #	ITEM DESCRIPTION
1	29103230	CLIP
2	29103240	SPRING
3	95151362	VENTURI
4	29103225	KNOB ASSEMBLY
5	29103220	O-RING
6	29103235	SLEEVE
7	29108215	SCREW
8	29103292	SCREW
9	29103297	HEX NUT
10	29103299	SPACER
11	29103293	NOZZLE
12	22071433	SPRING CLAMP
13	29103294	SCREW
14	29108247	HOSE ASSEMBLY 18"
	29108305	HOSE ASSEMBLY 36"
	29108268	HOSE ASSEMBLY 48"
15	29108123	SPACER
16	29108121	SCREW
17	29109182	PRESSURE TUBE
18	29108188	SUPPLY TUBE 18"
	29108189	SUPPLY TUBE 36"
	29108184	SUPPLY TUBE 48"
19	29108150	110V CORD STANDARD
	29103275	230V CORD W/O PLUG
20	29108135	SWITCH
	29103270	230V SWITCH
21	23089190	SWITCH BOOT
22	29108155	STRAIN RELIEF
23	22071003	CAP AND O-RING
24	29108246	NOZZLE ASSEMBLY
25	29103298	TUBE RETAINER
26	29109182	PRESSURE TUBE
27	29108140	STRAINER
28	29108160	WIRE CONNECTOR
29	29108156	GROMMET
30	-	OPEN

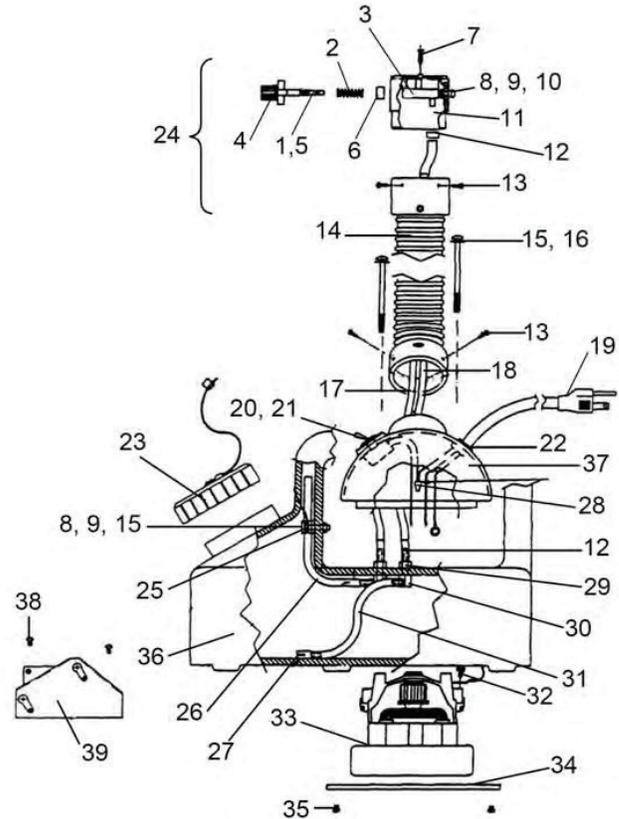

ITEM	PART #	ITEM DESCRIPTION
31	29108188	SUPPLY TUBE 18"
	29108189	SUPPLY TUBE 36"
	29108184	SUPPLY TUBE 48"
32	62047-1	EMI FILTER
33	29108190	MOTOR 110V
	29108195	MOTOR 230V
34	29108105	MOTOR GUARD
35	29108110	SCREW
36	95122955	TANK GREY
	95122954	TANK LT BLUE
37	95122949	DOME GREY 110V
	95122942	DOME LT BLUE 230V
38	22071045	SCREW
39	29103295	MOUNT PLATE

**NEW MOTOR MOUNTING BRACKET: #95122821**

**DOME GASKET: #29103291**

**ALL REPLACEMENT PARTS ARE AVAILABLE FOR SALE THROUGH DISTRIBUTOR**